WEM — 0502B

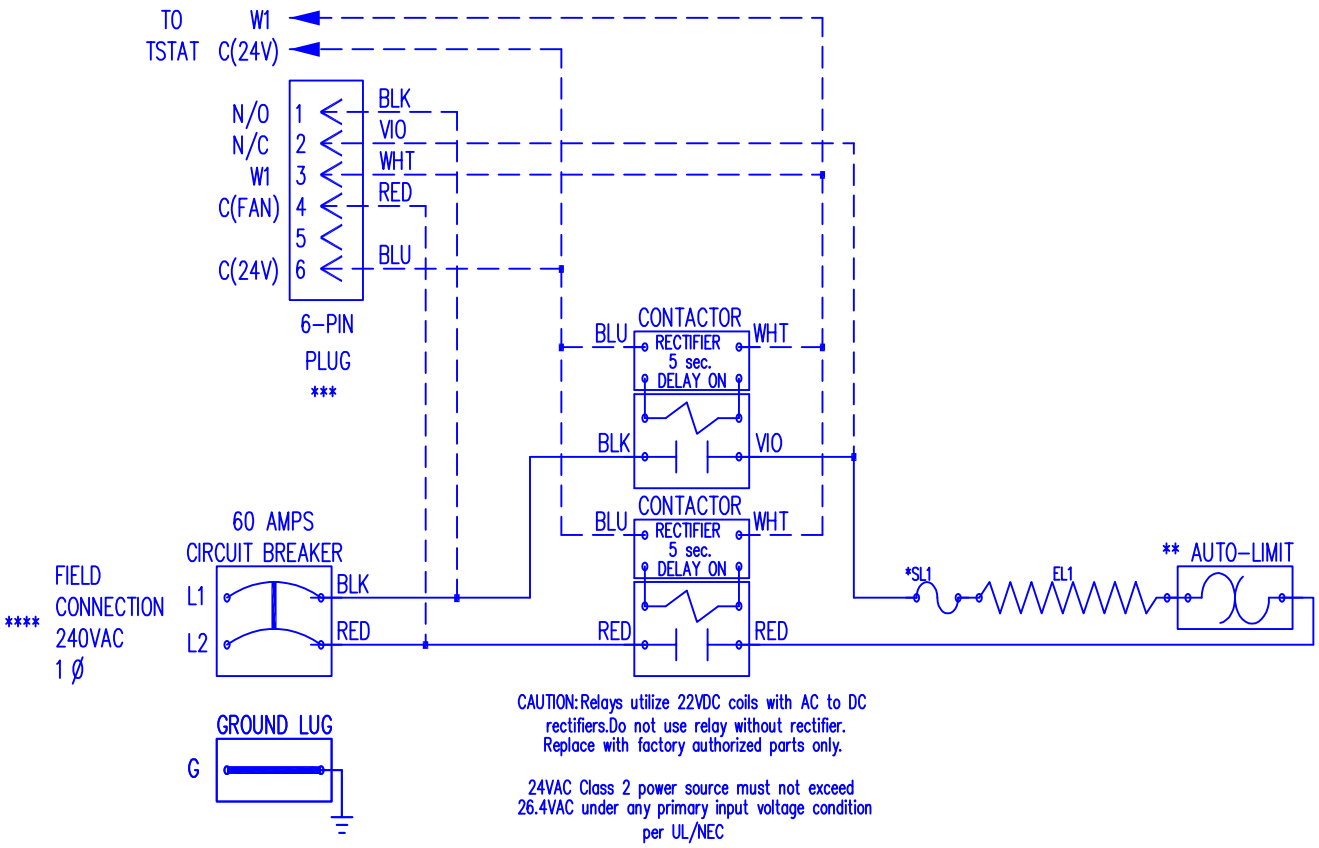

CAUTION: Relays utilize 22VDC coils with AC to DC rectifiers. Do not use relay without rectifier. Replace with factory authorized parts only.

24VAC Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC

Model	WEM-0502B
Serial #	
Tag -	
Kilowatts	4.8
Volts-Ph-Hz	240/1/60
Control Volts	24.0
Steps	1
Heater Amps	20.0
Circuit Breaker	60

NOTE :

* Replace "Service Loop" with SL075B

** Replace Auto-Reset with Therm-O-Disc type 60TX11-L165.

*** 24VAC, Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC.

**** Power supply wiring per NEC & Local Codes. Suitable for at least 75°C.

Use copper conductor wiring only.

Control Wiring _ _ _ _ _ _ _ _

Power Wiring _____

Field Wiring _____

WEM0502B

Rev. by : M. REEVES

Date : 02/27/15

WARREN TECHNOLOGY