WKF — 1505A

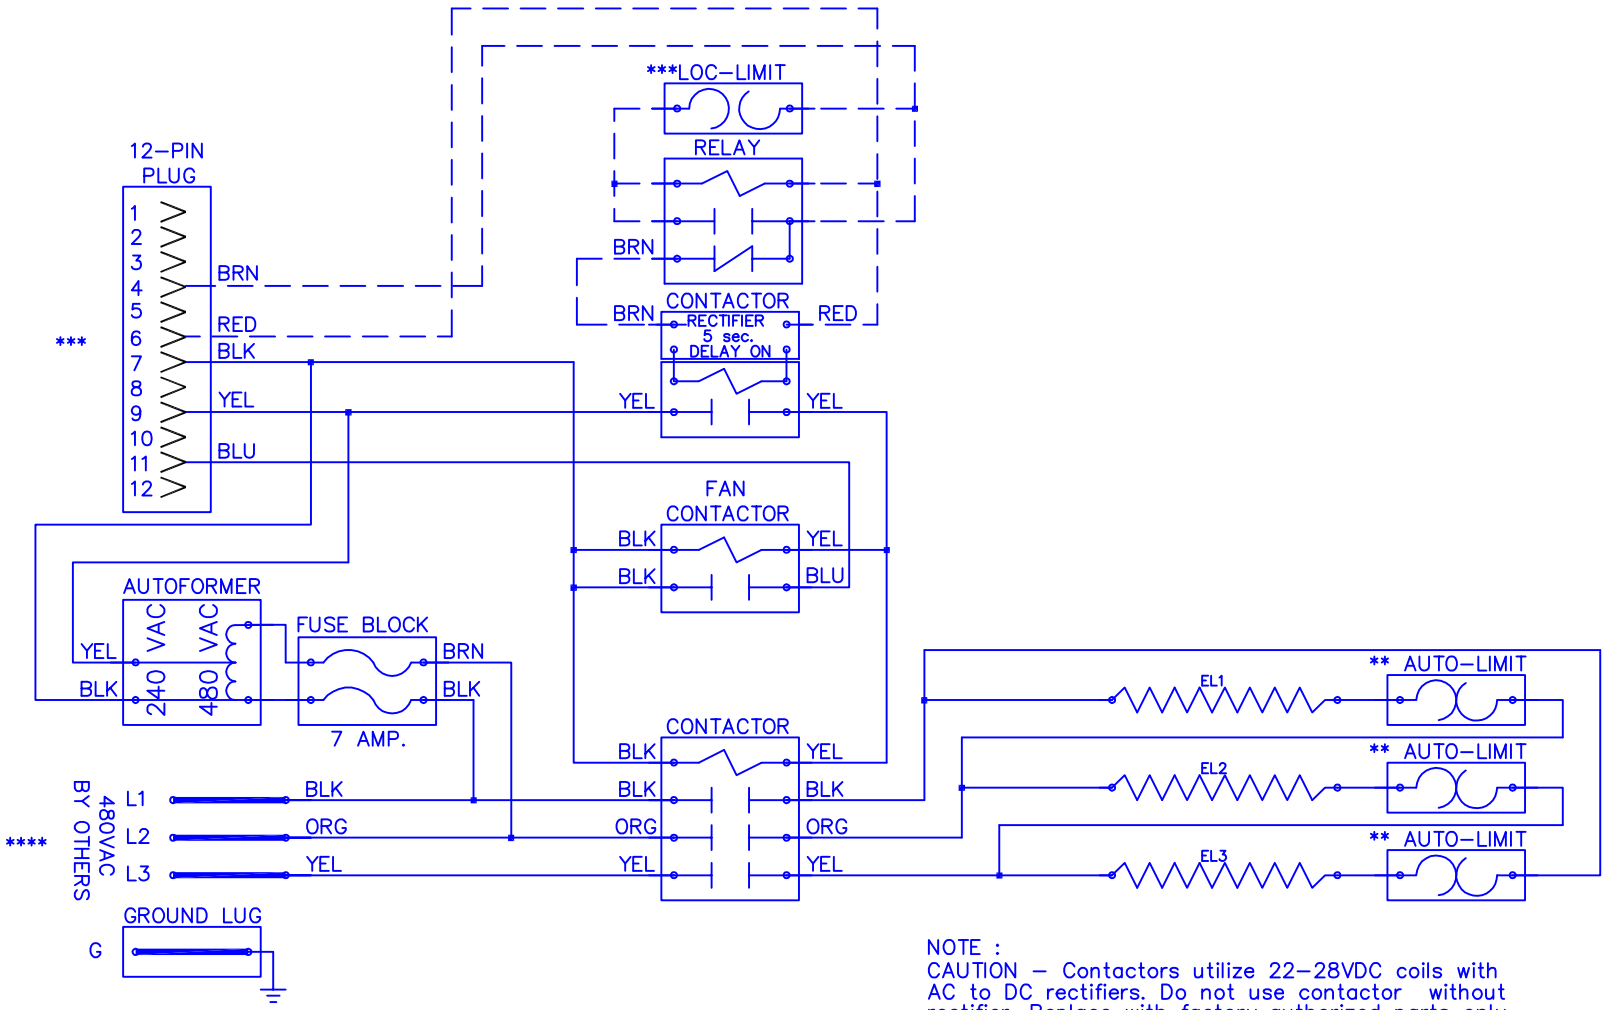

Model	WKF-1505A
Serial #	
Tag -	
Kilowatts	15.0
Volts-Ph-Hz	480/3/⏚/60
Control Volts	24.0
Steps	1
Heater Amps	18.0

NOTE :
CAUTION - Contactors utilize 22-28VDC coils with AC to DC rectifiers. Do not use contactor without rectifier. Replace with factory authorized parts only.
-Contactor must always utilize AC-DC Rectifier with Time Delay as shown.
** Replace Auto-Reset with Therm-O-Disc type 60TX11-F-165X.
*** Replace Lock-Out Limit with 36TXV12 - 150°C To Reset Lock-Out Limit, Cycle Power To The Heater With Either The Circuit Breaker Or The Thermostat.
**** 24VAC, Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC.
***** Power supply wiring per NEC & Local Codes. Suitable for at least 75°C.
Use copper conductor wiring only.

Control Wiring - - - - - -
Power Wiring ———————
Field Wiring ———————

WKF1505A

Rev. by : M. REEVES
Date : 08/08/18

WARREN TECHNOLOGY