


WEM

0502D

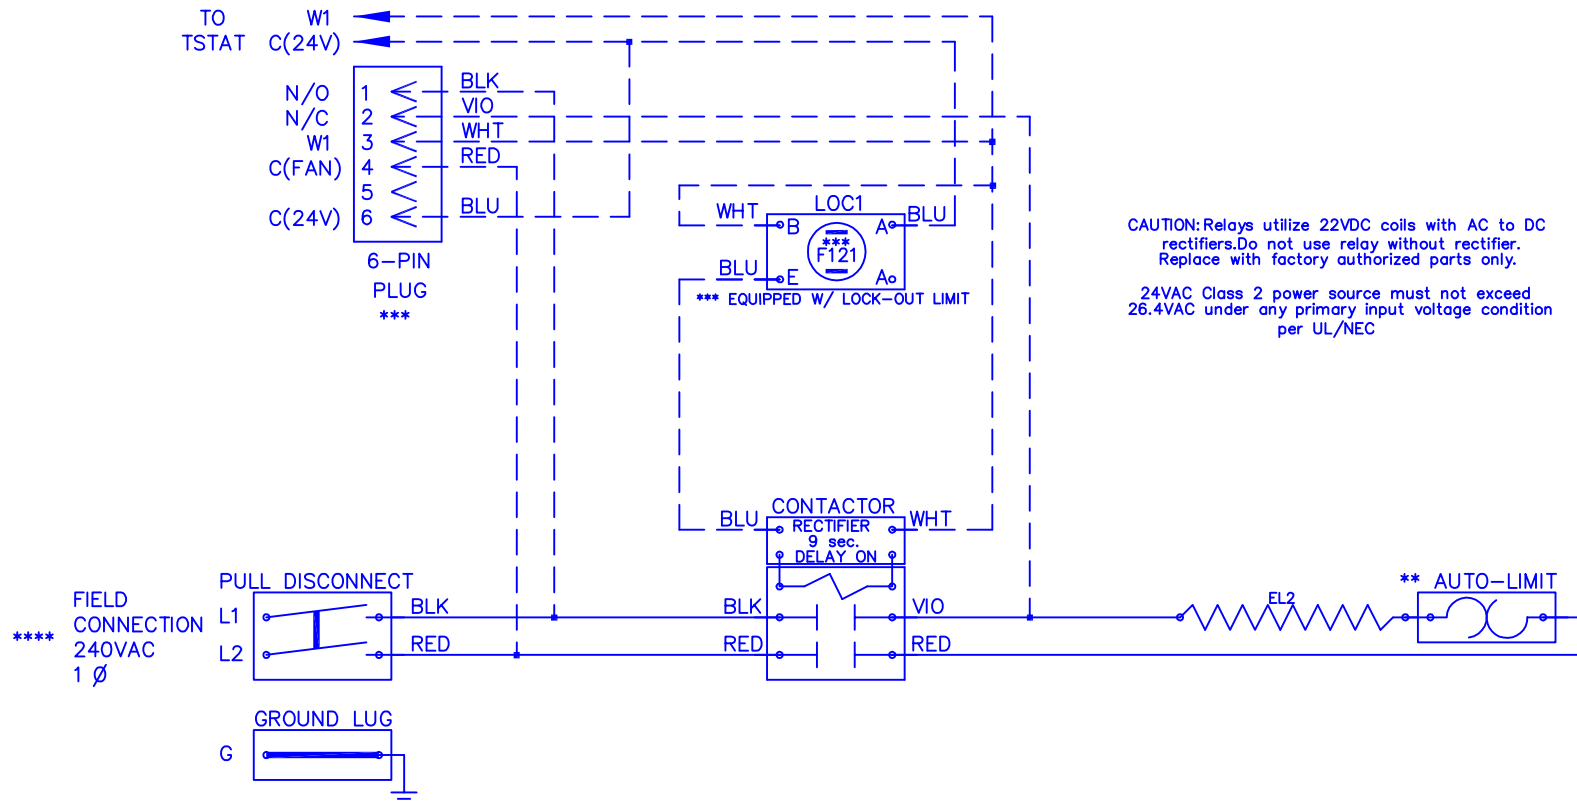

Model	WEM-0502D
Serial #	_____
Tag -	_____
Kilowatts	4.8
Volts-Ph-Hz	240/1/60
Control Volts	24.0
Steps	1
Heater Amps	20.0

NOTE :

CAUTION - Contactors utilize 22-28VDC coils with AC to DC rectifiers. Do not use contactor without rectifier. Replace with factory authorized parts only.

-Contactor must always utilize AC-DC Rectifier with Time Delay as shown.

\*\* Replace Auto-Reset with Therm-O-Disc type 60TX11-L165.

\*\*\* Replace Lock-Out Limit with 36TXV12 - 121° C To Reset Lock-Out Limit, Cycle Power To The Heater With Either The Circuit Breaker Or The Thermostat.

\*\*\*\* 24VAC, Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC.

\*\*\*\*\* Power supply wiring per NEC & Local Codes. Suitable for at least 75°C. Use copper conductor wiring only.

Control Wiring      - - - - -

Power Wiring        \_\_\_\_\_

Field Wiring         \_\_\_\_\_

WEM0502D

Rev. by : M. REEVES  
Date : 02/10/20

WARREN TECHNOLOGY