





WXD — 1005X



24VAC Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC



*** FIELD CONNECTION 480VAC 3 ϕ

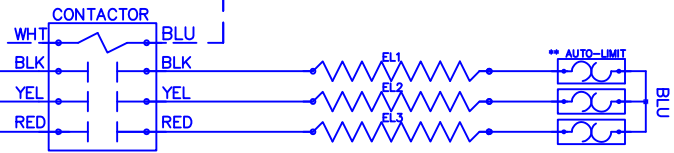

Model	WXD-1005X
Serial #	_____
Tag -	_____
Kilowatts	10.0
Volts-Ph-Hz	480/3Y/60
Control Volts	24.0
Steps	1
Heater Amps	12.03
Fuse Size	20

NOTE :

- * Replace Auto-Reset with Therm-O-Disc type 60TX11-F145X.
 - ** Replace Lock-Out Limit with 36TXV12 - 121° C To Reset Lock-Out Limit, Cycle Power To The Heater With Either The Circuit Breaker Or The Thermostat.
 - *** 24VAC, Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC.
 - **** Power supply wiring per NEC & Local Codes. Suitable for at least 75°C.
- Use copper conductor wiring only.

Control Wiring	-----
Power Wiring	=====
Field Wiring	=====

WXD1005X

Rev. by : M. REEVES
Date : 05/10/21

WARREN TECHNOLOGY