


WKJF - 0231B / 0302B

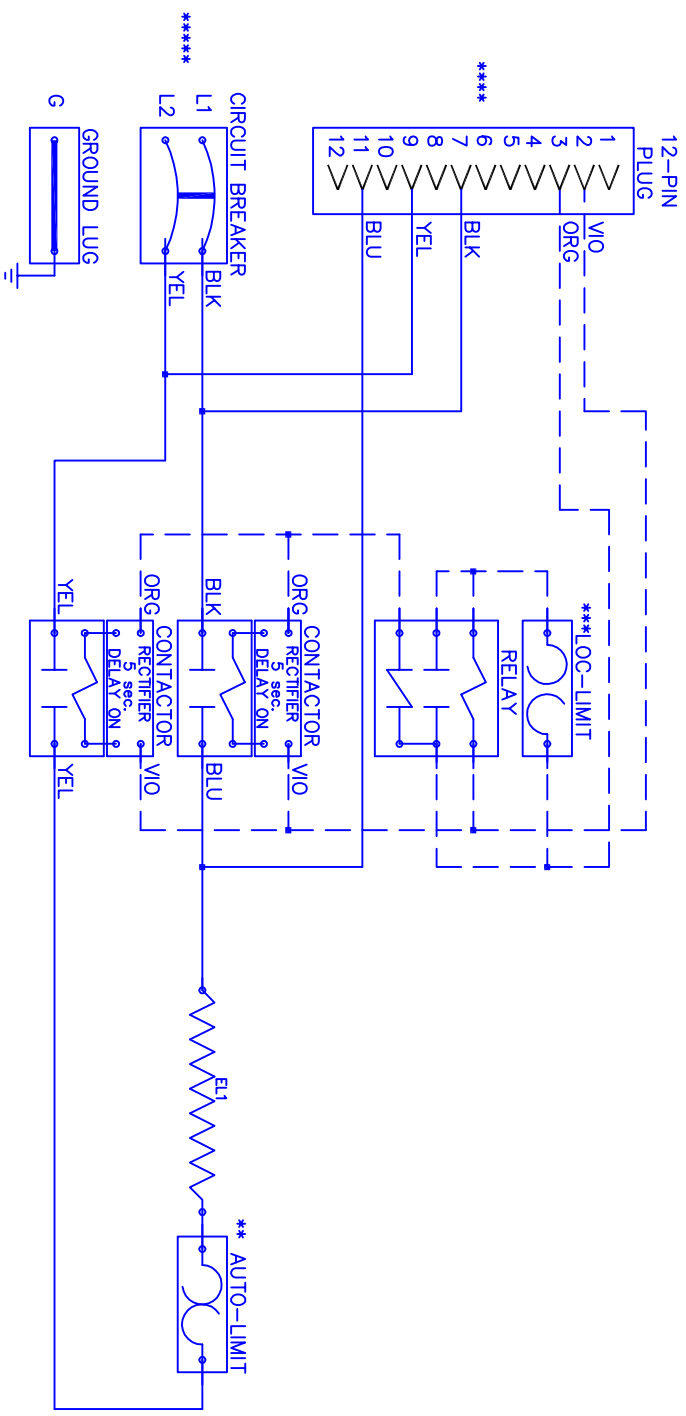

NOTE :

CAUTION - Contactors utilize 22-28VDC coils with AC to DC rectifiers. Do not use contactor without rectifier. Replace with factory authorized parts only.

-Contactor must always utilize AC-DC Rectifier with Time Delay as shown.

** Replace Auto-Reset with Therm-O-Disc type 60TX11-L165.

*** Replace Lock-Out Limit with 36TXV12 - 150°C To Reset Lock-Out Limit, Cycle Power To The Heater With Either The Circuit Breaker Or The Thermostat.

**** 24VAC, Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC.

***** Power supply wiring per NEC & Local Codes. Suitable for at least 75°C.

Use copper conductor wiring only.

Control Wiring _____

Power Wiring _____

Field Wiring _____

Model	_____	WKJF-0231B/0302B
Serial #	_____	
Tag -	_____	
Kilowatts	2.3 / 2.76	
Volts-Ph-Hz	208/230/1/60	
Control Volts	24.0	
Steps	1	
Heater Amps	10.9 / 12.0	
Circuit Breaker(s)	SEE INSTALLER LABEL	

WKJF0302B

Rev. by : M. REEVES

Date : 05/02/18

WARREN TECHNOLOGY