


WKJF — 0381B / 0502B

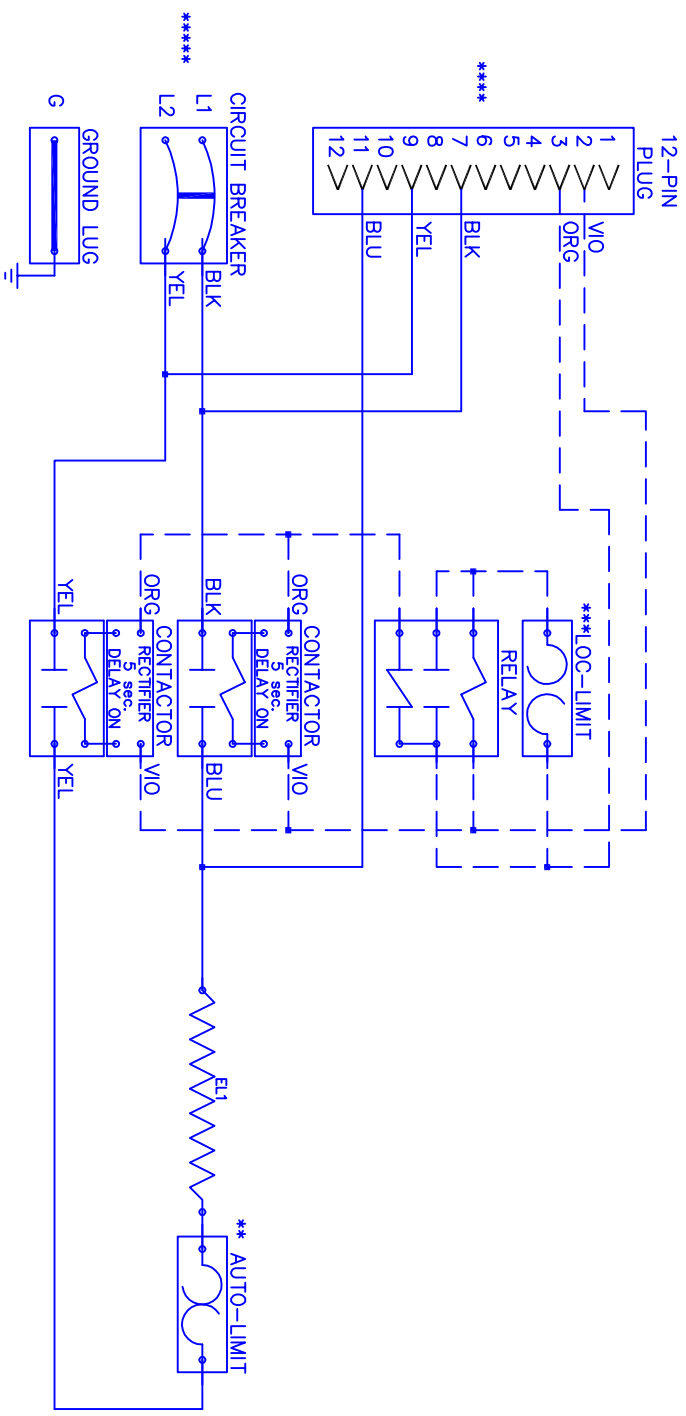

Model _____ WKJF-0381B/0502B
 Serial # _____
 Tag — _____
 Kilowatts _____ 3.75 / 4.6
 Volts-Ph-Hz _____ 208/230/1/60
 Control Volts _____ 24.0
 Steps _____ 1
 Heater Amps _____ 18.1 / 20.0
 Circuit Breaker(s) _____ SEE INSTALLER LABEL

NOTE :
 CAUTION — Contactors utilize 22-28VDC coils with AC to DC rectifiers. Do not use contactor without rectifier. Replace with factory authorized parts only.
 —Contactor must always utilize AC-DC Rectifier with Time Delay as shown.
 ** Replace Auto-Reset with Therm-O-Disc type 60TX11-L165.
 *** Replace Lock-Out Limit with 36TXV12 — 150°C To Reset Lock-Out Limit, Cycle Power To The Heater With Either The Circuit Breaker Or The Thermostat.
 **** 24VAC, Class 2 power source must not exceed 26.4VAC under any primary input voltage condition per UL/NEC.
 ***** Power supply wiring per NEC & Local Codes. Suitable for at least 75°C.
 Use copper conductor wiring only.

Control Wiring _____
 Power Wiring _____
 Field Wiring _____

WKJF0502B